


TOP VIEW

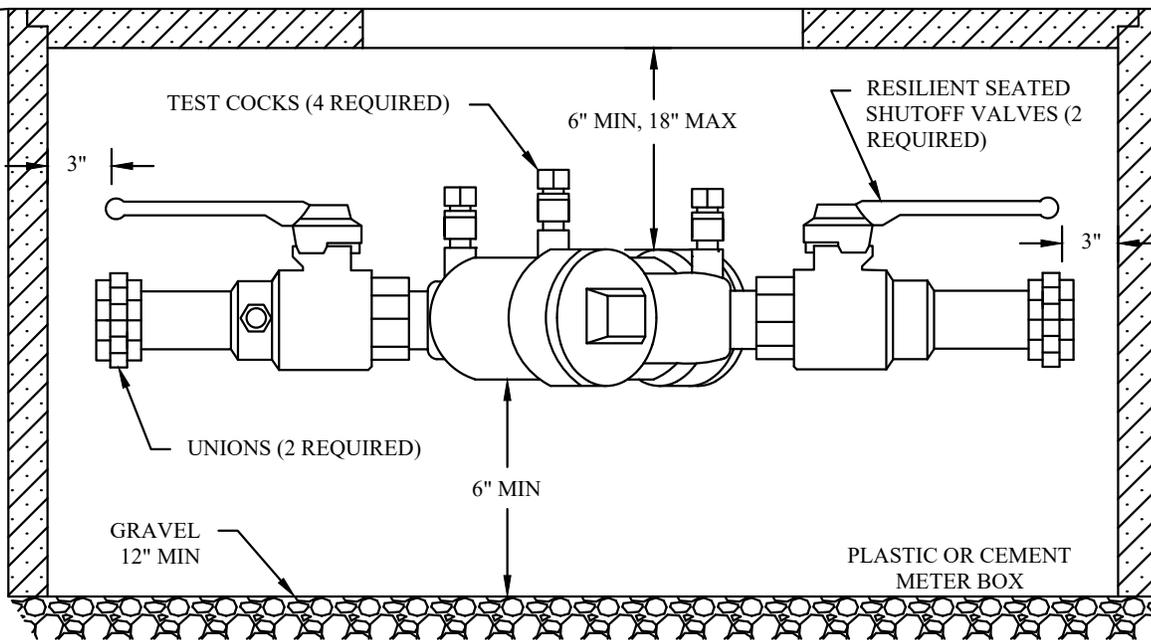

SIDE VIEW

(BELOW GROUND INSTALLATION)

NOTES:

1. APPROVED DOUBLE CHECK VALVE ASSEMBLY TO LAY HORIZONTAL WITH GROUND. - DESIGNED FOR BACK SIPHONAGE AND BACK PRESSURE.
2. TEST COCKS TO EITHER FACE OUTWARDS OR UPWARDS FROM ASSEMBLY. - THOROUGHLY FLUSH LINES PRIOR TO INSTALLATION OF BACKFLOW PREVENTER. INSTALL SO DATA PLATE & S/N ARE READABLE.
3. THE DCVA MAY BE INSTALLED ABOVE OR BELOW THE GROUND PROVIDED ALL CLEARANCES ARE MET - DO NOT INSTALL IN AN AREA SUBJECT TO FLOODING.
4. MUST BE PROTECTED FROM FREEZING CONDITIONS.
5. THE BACKFLOW ASSEMBLY SHALL BE A STATE APPROVED MODEL.
6. A PLUMBING PERMIT IS REQUIRED, PLEASE CONTACT YOUR LOCAL PLUMBING PERMIT CENTER.
7. MUST BE TESTED AFTER INSTALLATION AND YEARLY THEREAFTER BY A WASHINGTON STATE CERTIFIED BACKFLOW ASSEMBLY TESTER. TEST RESULTS SHALL BE SENT TO THE CITY OF WASHOUGAL ACCORDING TO DETAIL W110.



**STANDARD DOUBLE CHECK VALVE  
ASSEMBLY - 2" & SMALLER**

DATE: December 2016

DETAIL  
NO.

**W120**